




FOOTBALL 75m x 115m

Feasible Solution Proposal for Air Dome Venue GS AIR DOME2

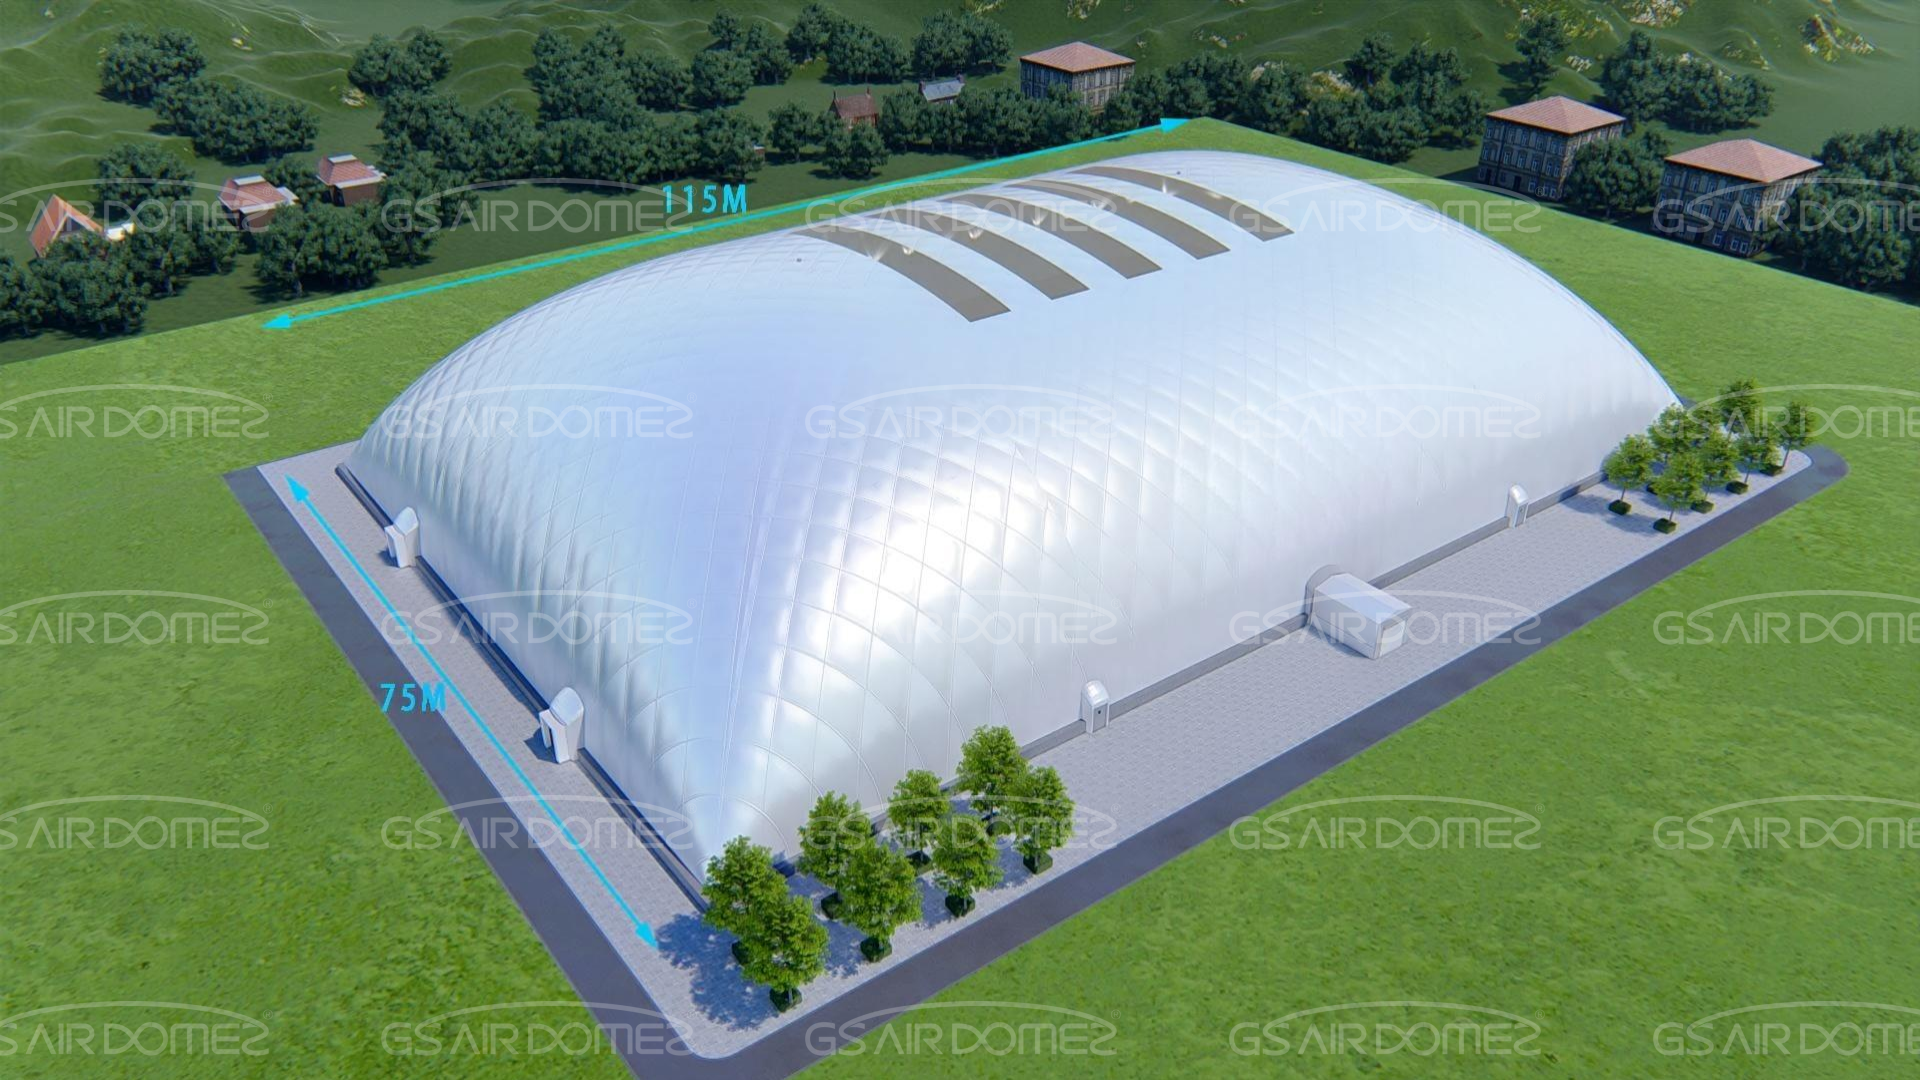


PART 1: THE STEPS FOR CLEAN-UP WORK

PART 2: OPTIONS AND EXPLANATIONS FOR CONFIGURATIONS


PART 3: ONE-STEP SOLUTION FROM GS AIR DOMES

PART 1-1.1 Remove the steel angle

1. Remove the original steel angle, loosen all the bolts. If necessary, apply rust remover.

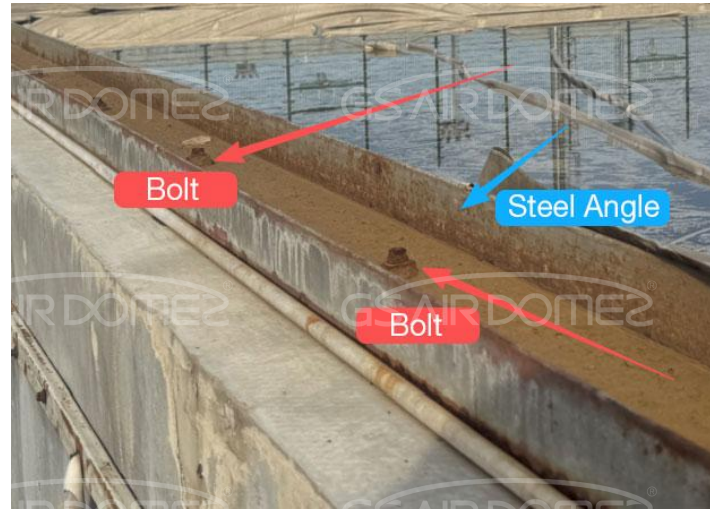

2. GS will provide all the accessories, which showed in this left pictures.

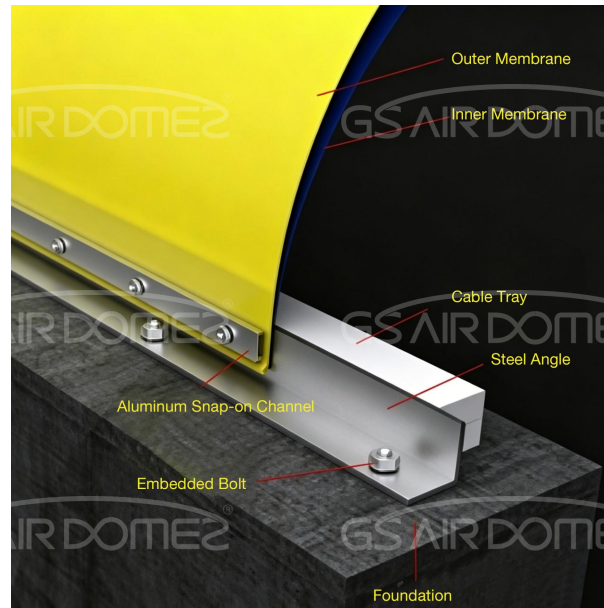

PART 1-1.2

Remove the rolling door and safety door



PART 1-1.3

Remove the fans

(whether the fan cables will be retained is yet to be confirmed)



PART 1-1.2 Remove the old membrane material

The main membrane material is composed of several membrane units that are joined together. If it needs to be disassembled, the joints should be removed, the existing water should be drained. It should be packed and stored.

Or it can be destructively dismantled into small pieces for packaging and handling.



Need the Full Documentation?

Please share your project requirements with our team to request the full version.

project@gsdomes.com

PLEASE INCLUDE

Project Location · Dimensions (L × W × H) · Intended Application